




Inspection Equipment

Easily convert from a coating thickness gauge to a dew point meter or surface profile gauge with interchangeable gauge bodies and probes!

DeFelsko®

PosiTector Bodies

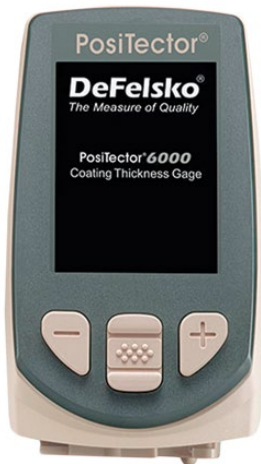

Standard PosiTector Body
 Accepts all PosiTector probes
 USB port
 PosiSoft.net - free online storage
 Software updates
 LCD colour display
 250 readings in 1 batch

Advanced PosiTector Body
 Accepts all PosiTector probes
 USB port
 PosiSoft.net - free online storage
 Software updates
 LCD colour display
 10 000 readings in 1 000 batches
 Wifi
 Bluetooth
 Real-time graphing

Interchangeable Gauge Bodies and Probes!

strictly superior

PosiTector Probes



PosiTector 6000
 Measures coating thickness on ferrous and non-ferrous metals.



PosiTector SPG
 Measures peak to valley surface profile heights.

 Integrated and separate probes.



PosiTector 200
 Measures coating thickness on non-metallic substrates including concrete, wood and plastics.



PosiTector DPM
 Measures climatic conditions including relative humidity and surface temperature.



PosiTector UTG
 Measures the wall thickness of materials such as steel and plastic using ultrasonic technology.



PosiTector SHD
 Shore hardness durometer - measures the indentation hardness of non-metallic materials i.e. rubber.



PosiTector SST
 Soluble salt tester that measures the concentration of soluble salts on metal surfaces.



PosiTector RTR
 Digital micrometer for measuring surface profile with replica tape (testex tape).

Inspection Kits Available



PosiSoft Solutions

View, Analyze, Report & Store Measurement Data

Generate custom, professional PDF reports.

Compile multi-batch reports from one or more probes and instrument types.

4 free ways to view & report your data!

PosiSoft Desktop (v 4) - PC/Mac
PosiSoft.net - Web-based
PosiTector App - Mobile
PosiSoft USB Drive - Gauge based



PosiTest LPD

Low Voltage Pinhole Detector

The PosiTest LPD Low Voltage Pinhole Detector detects holidays, pinholes and other discontinuities on metal and concrete substrates.

Adaptable sponge hardware and extension accessories available.



PosiTest AT

Pull-Off Adhesion Tester

Measures adhesion of coatings to metal, wood, concrete and other rigid substrates.

Available in automatic and manual models.

10, 14, 20 or 50 mm dollies maximize capability and measurement resolution across a wide range of bond strengths.



PosiPatch

Re-usable Patch For Measuring Salt Contamination

Used for measuring salt contamination with the PosiTector SST.

Magnetic ring attaches to steel - no residue to clean! Standard and flexible magnetic rings available.

Latex-free, polyurethane patches (DeFelsko Adhesive Patch) also available.



Contact:

HQ Gauteng
+27 (0)11 894 2005

Kwazulu Natal:
+27 (0)31 700 8332

Western Cape:
+27 (0)21 510 6385

Eastern Cape:
+27 (0)41 581 0280

sales@stormmachinery.co.za

www.stormmachinery.co.za

0861 1 STORM (78676)

