

PosiTector® **DPM L Series**

Dew Point Meter Loggers

**Magnetic probes attach to steel structures
for monitoring climatic conditions**

Measures and records climatic conditions including:
Relative humidity, air temperature, surface temperature, dew point temperature, difference between surface and dew point temperatures, and wet bulb temperature. Ideal for surface preparation as required by ISO 8502-4.



PosiTector DPM L



PosiTector DPM L+

**STORM
MACHINERY**

DeFelsko®
The Measure of Quality



Bluetooth®



D A T A S E T

MEASURES

RH – relative humidity
Ta – air temperature
Ts – surface temperature

CALCULATES

Td – dew point temperature
Ts-Td – the difference between surface and dew point temperatures
Tw – wet bulb

PosiTector® DPM L Series

Dew Point Meter Loggers

Features...

Simple

- Attaches to steel structures to measure and record environmental parameters independently for up to 200 days (DPM L) or 600 days (DPM L+)
- Records parameters at user selected intervals from 1 min. to 8 hrs.
- Connect via Bluetooth to an Apple/Android device to view live data, configure settings, start logging, and email reports
- Uses common CR2032 Coin cell (PosiTector DPM L) or AAA batteries (PosiTector DPM L+)

Durable

- Environmentally sealed enclosure—weatherproof, dustproof, and shockproof—meets or exceeds IP65
- Two-year warranty
- Kensington Security Slot for anti-theft protection. PosiTector DPM L Lock sold separately.

Accurate

- Fast response, precision sensors provide accurate, repeatable readings
- Certificate of Calibration showing traceability to NIST included
- Conforms to national and international standards including ISO and ASTM

Powerful

- Automatically generate user-formatted reports and share via email, text, and cloud storage services
- Internal memory storage of 10,000 datasets (60,000 readings)—every stored dataset is date and time stamped

Two Ways to View Logged Readings

On-Site

(PosiTector DPM L & PosiTector DPM L+)

Connect to the PosiTector App, an easy-to-use mobile app (iOS/Android) that wirelessly connects using Bluetooth


Download readings for review and analysis



Remote

(PosiTector DPM L+ only)

Continuously upload readings to PosiSoft.net using a WiFi connection, to remotely monitor job site conditions from anywhere using a PC or Mac

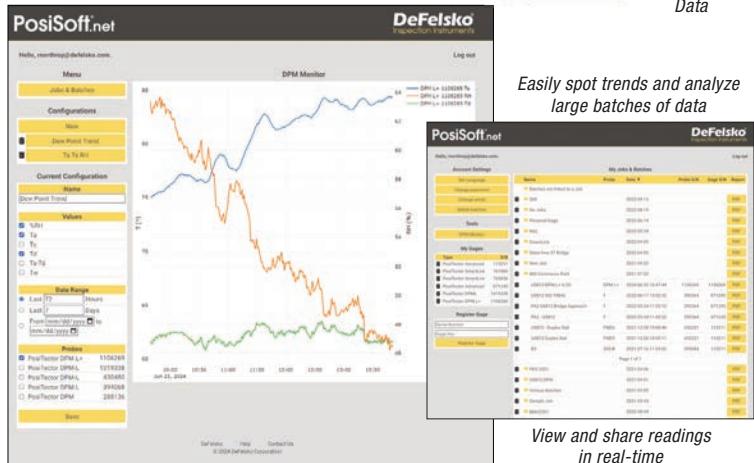

Select from Two Powerful Solutions

PosiTector DPM L

Dew Point Meter Logger

Ideal for unattended logging of environmental data

- Includes all features listed at left



PosiTector DPM L+

Dew Point Meter Logger Plus

Ideal for unattended logging and remote monitoring of environmental data

- Includes all features listed at left
- Automatically upload readings to PosiSoft.net at user-specified intervals to remotely monitor environmental conditions (WiFi network required)
- Configure email alarms for notification when conditions exceed pre-set thresholds
- Automatically group readings at daily, weekly, or monthly intervals
- USB port for supplying continuous power



Specifications	Range	Accuracy	Resolution
Surface Temperature	-10° to 0° C	± 1.5° C	0.1° C
	>0° to 80° C	± 0.5° C	
	>80° to 100° C	± 1.5° C	
	14° to 32° F	± 2.7° F	
	>32° to 176° F	± 0.9° F	
	>176° to 212° F	± 2.7° F	
Air Temperature	-10° to 60° C	± 0.5° C	0.1° C
	14° to 140° F	± 1° F	0.1° F
Humidity	0 to 100%	± 3%	0.1%
Dew Point	-60° to 60° C	± 3° C [‡]	0.1° C
	-76° to 140° F	± 5.4° F [‡]	0.1° F

[‡] Dependent on RH. See www.defelsko.com/TdAccuracy for more information.

Ordering Guide

PosiTector DPM L	DPML
PosiTector DPM L+	DPMLPLUS

PROBES COME COMPLETE with air/surface temperature sensors, RH sensor, two batteries, protective cover, instructions, Long Form Certificate of Calibration traceable to NIST, and two year warranty.



Conforms to ISO 8502-4, BS 7079-B4, ASTM D3276, IMO PSPC, SSPC-PA7 and US Navy NSI 009-32.