



STORM MACHINERY

INTERNAL PIPE COATERS

INNOVATIVE INTERNAL COATING UNITS





CONVENTIONAL ROTORCOATER

PNEUMATIC MOTOR SPINS ROTARY CUP

MANUALLY PULLED THROUGH PIPE

ADJUSTABLE LEGS


MINIMAL WEAR PARTS

CONNECTS TO ANY CONVENTIONAL
SPRAY EQUIPMENT

PAINT DELIVERED VIA CENTRIFUGAL FORCE

INTERNAL PIPE DIAMETER: 300 - 700 MM

AIR CONSUMPTION: 14 CFM @ 5 BAR

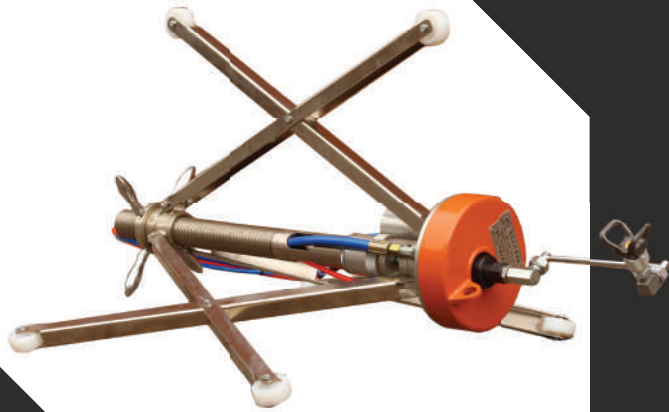

AIRLESS ROTORCOATER

IDEAL FOR HIGH DFT APPLICATIONS

PNEUMATIC MOTOR SPINS ROTARY CUP

MANUALLY PULLED THROUGH PIPE

ADJUSTABLE LEGS

MINIMAL WEAR PARTS

CONNECTS TO ANY AIRLESS SPRAY EQUIPMENT

INTERNAL PIPE DIAMETER: 600 - 1200 MM

AIR CONSUMPTION: 15 CFM @ 5 BAR

EXTERNAL CONTROL BOX REGULATES
MOTOR SPEED

AIRLESS FLAT SPRAY TIP = SPRAY WIDE
VARIETY OF PAINTS



STORMMACHINERY.CO.ZA