



STORM MACHINERY

AIRLESS GUN RANGE

COMPREHENSIVE AIRLESS RANGE



PREMIERE AIRLESS GUNS



TRITECH T360

3600 PSI (250 BAR) MAX WORKING PRESSURE

Features:

- Positive shut-off
- Large fluid passages
- Aluminium forgings
- Easy filter access
- Superior valve stem design



TRITECH T720

7200 PSI (500 BAR) MAX WORKING PRESSURE

Features:

- Positive shut-off
- Large fluid passages
- Aluminium forgings
- Easy filter access
- Superior valve stem design



FRONT ENTRY GOLD GUN

7300 PSI (510 BAR) MAX WORKING PRESSURE

Features:

- Fast in-out front entry gun
- Ideal for high viscosity / high volume solids content paint
- No gun filter allows for easy maintenance
- Easily accessible fluid section

STANDARD AIRLESS GUNS



KL 250

3600 PSI (250 BAR) **MAX WORKING PRESSURE**

Features:

Thumb-engaged safety lock

Replaceable in-hand filter

4 finger trigger



STORMX 500

7200 PSI (500 BAR) **MAX WORKING PRESSURE**

Features:

Thumb-engaged safety lock

Replaceable in-hand filter

4 finger trigger



FRONT ENTRY BLACK GUN

7300 PSI (510 BAR) **MAX WORKING PRESSURE**

Features:

Fast in-out front entry gun

Ideal for high viscosity / high volume solids content paint

No gun filter allows for easy maintenance

Easily accessible fluid section

PREMIERE SPRAY TIPS



TRITECH CONTRACTORS SPRAY TIP

Patented seal alignment for easy fitting


Mega-hard tungsten carbide and stainless steel

Patented seal alignment

122 different fan patterns

Ideal for industrial coatings

MAX WORKING PRESSURE: 3600 PSI (250 BAR)



SEAL ALIGNMENT

ID TAG



FAN WIDTH - INCHES										
GPM	2-4	4-6	6-8	8-10	10-12	12-14	14-16	16-18	18-20	LPM
0.05	107	207	307	407	/	/	/	/	/	0.020
0.09	109	209	309	409	509	609	/	/	/	0.33
0.12	111	211	311	411	511	611	/	/	/	0.49
0.18	113	213	313	413	513	613	713	813	/	0.69
0.24	115	215	315	415	515	615	715	815	/	0.91
0.31	117	217	317	417	517	617	717	817	917	1.17
0.38	/	219	319	419	519	619	719	819	919	1.47
0.47	/	221	321	421	521	621	721	821	921	1.79
0.27	/	223	323	423	523	623	723	823	923	2.15
0.67	/	225	325	425	525	625	725	825	925	2.54
0.74	/	/	327	427	527	627	727	827	927	2.96
0.90	/	/	329	429	529	629	729	829	929	3.42
1.03	/	/	331	431	531	631	731	831	931	3.90
1.17	/	/	333	433	533	633	733	833	933	4.42
1.31	/	/	335	435	535	635	735	835	935	4.98
1.47	/	/	337	437	537	637	737	837	937	5.56
1.63	/	/	339	439	539	639	739	839	939	6.18
	5-10	10-15	15-20	20-25.5	20.5-30.5	30.5-35.5	35.5-40.5	40.5-46	46-51	
FAN WIDTH - CENTIMETERS										

PREMIERE SPRAY TIPS



TRITECH ULTRA FINE SPRAY TIP

Patented seal alignment for easy fitting

Mega-hard tungsten carbide and stainless steel

Patented seal alignment

25 different fan patterns

Unique double orifice for ultra fine finish

Ideal for varnishes, stains and QD paints

MAX WORKING PRESSURE: 5000 PSI (345 BAR)

TriTech 
MADE IN THE U.S.A.

FAN WIDTH - INCHES							
GPM	2-4	4-6	6-8	8-10	10-12	12-14	LPM
0.05	108	208	308	408	/	/	0.20
0.09	110	210	310	410	510	/	0.33
0.12	112	212	312	412	512	612	0.49
0.18	114	214	314	414	514	614	0.69
0.24	/	/	/	/	516	616	0.91
0.31	/	/	/	/	518	618	1.17
	5-10	10-15	15-20	20-25.5	25.5-30.5	30.5-35.5	
FAN WIDTH - CENTIMETERS							

STANDARD SPRAY TIPS



RAC5 SPRAY TIP

Tungsten carbide and stainless steel

Ideal for industrial coatings

22 different fan patterns

MAX WORKING PRESSURE: 4050 PSI (280BAR)

FAN WIDTH - INCHES

GPM	2-4	4-6	6-8	8-10	10-12	12-14	14-16	16-18	18-20	LPM
0.05	107	207	307	407	/	/	/	/	/	0.020
0.09	109	209	309	409	509	609	/	/	/	0.33
0.12	111	211	311	411	511	611	/	/	/	0.49
0.18	113	213	313	413	513	613	713	813	/	0.69
0.24	115	215	315	415	515	615	715	815	/	0.91
0.31	117	217	317	417	517	617	717	817	917	1.17
0.38	/	219	319	419	519	619	719	819	919	1.47
0.47	/	221	321	421	521	621	721	821	921	1.79
0.27	/	223	323	423	523	623	723	823	923	2.15
0.67	/	225	325	425	525	625	725	825	925	2.54
0.74	/	/	327	427	527	627	727	827	927	2.96
0.90	/	/	329	429	529	629	729	829	929	3.42
1.03	/	/	331	431	531	631	731	831	931	3.90
1.17	/	/	333	433	533	633	733	833	933	4.42
1.31	/	/	335	435	535	635	735	835	935	4.98
1.47	/	/	337	437	537	637	737	837	937	5.56
1.63	/	/	339	439	539	639	739	839	939	6.18
	5-10	10-15	15-20	20-25.5	20.5-30.5	30.5-35.5	35.5-40.5	40.5-46	46-51	

FAN WIDTH - CENTIMETERS



TRITECH TIP GAURD STANDARD

Multi-purpose tip guard designed to hold a spray tip and prevent injuries from high pressure paint injection.

MAX WORKING PRESSURE:
3600 PSI (250BAR)

TriTech 
MADE IN THE U.S.A.




TRITECH TIP GAURD MAX

Multi-purpose tip guard designed to hold a spray tip and prevent injuries from high pressure paint injection.

MAX WORKING PRESSURE:
7200 PSI (500BAR)


TriTech 
MADE IN THE U.S.A.

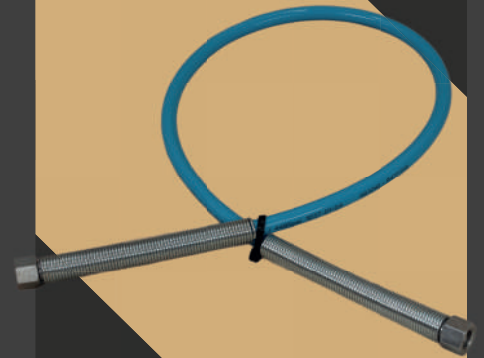

COTTON BRAIDED AIRLESS PAINT HOSE

High-pressure airless paint hose.


Hose size (ID)	Max. Working Pressure
1/4"	225 bar
3/8"	225 bar

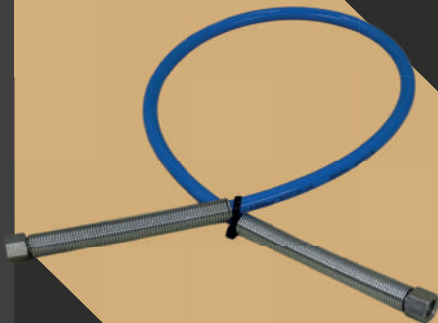

STEEL BRAIDED AIRLESS PAINT HOSE

High-pressure airless paint hose.

Hose size (ID)	Max. Working Pressure
1/4"	420 bar
3/8"	350 bar

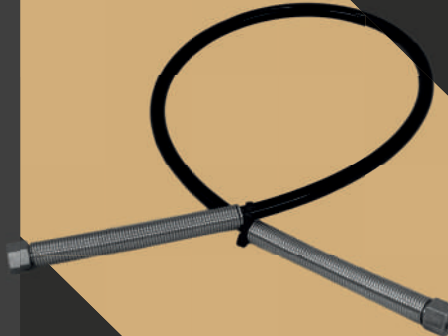

550 BAR STEEL BRAIDED AIRLESS PAINT HOSE

High-pressure airless paint hose.

Hose size (ID)	Max. Working Pressure
1/2"	550 bar
3/8"	550 bar



STORMMACHINERY.CO.ZA